

KEOFITT SAMPLING BAG™ WITHOUT HANGER E-BEAM STERILISED 250 ml ART. NO. 150256

GENERAL

- The KEOFIT Sampling Bag is the ideal sampling bag solution for any liquid food/dairy application. The unique design provides an effective sterilization/disinfection of the sample flow path to ensure the integrity of the sample. The bag can stand upright when filled.
- The KEOFIT Sampling Bag is a single-use multi-layer sampling bag manufactured under clean room conditions (ISO class 8).
- The KEOFIT Sampling Bag is intended for collecting samples for microbiological, chemical and/or physical analysis.
- Designed for sampling of any liquids containing particles with a diameter of up to 15 mm.
- 6 KEOFIT sampling bags fulfilling most sampling needs (S&M input)
The KEOFIT Sampling Bag is a single-use product available in following 6 versions
9 mm inlet:
Bio Burden, 250ml(#150255) - 1000 ml (#151000) - 2000 ml (#152000).
Sterile, 250ml(#150256) - 1000 ml (#151001) - 2000 ml (#152001).



FEATURES

- Compatible with all KEOFIT sampling valves and sampling systems by using the quick couplings for connection to the KEOFIT Sampling bag inlet and outlet, See options on page 2:
- Inlet: white / Outlet: blue
- both protected by a peel-off aluminum foil seal.

CERTIFICATION*

EU EC 1935/2004 · EU EC 2023/2006 · EU EC 10/2011


TECHNICAL DATA

Material

Bag: Polypropylene (OPA 15 / 100 PP)
Inlet / Outlet: Polypropylene (Purell HP671T)
O-ring: Silicone, red (#150820, #150859)

Pressure & Temperature

Product temperature: Up to 80°C / 176°F
CIP: Max. 2,4 bar / 34,0 psi at 85°C / 185°F
5 min (in Clean position)
SIP: Max 1,1 bar / 16,0 psi at 125°C / 257°F
30 min (in Clean position)

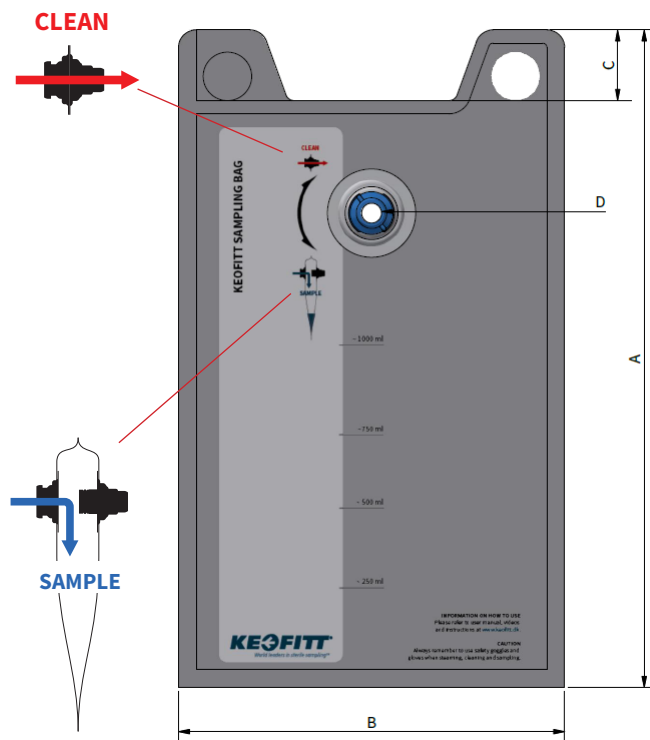

	Burst pressure / max recommended pressure	Net weight	Height A	Width B	Ears C
250 ml	0,6 bar / 0,3 bar	0,0148 kg / 0,0326 lbs	138	175	0
1000 ml	0,5 bar / 0,25 bar	0,0201 kg / 0,0443 lbs	230	175	33
2000 ml	0,4 bar / 0,2 bar	0,0255 kg / 0,0562 lbs	318	230	33

Net weight

Kg/lbs: 0.022 kg/0.049 lbs


STORAGE AND SHELF LIFE

The KEOFIT Sampling Bag should be stored in dry storage areas between 15-25 °C, 40-70% humidity and should always be kept out of direct sunlight and away from any source of artificial ultraviolet light. Store in dry and dust free areas in the original packing for as long as possible. Shelf life: 3 years from production.



Fittings for the KEOFITT SAMPLING BAG™

INLET



#150083
QUICK COUPLING KSB INLET
FOR HOSE PIECE



#150084
QUICK COUPLING KSB INLET
3/4" CLAMP



#150085
QUICK COUPLING KSB INLET
1" CLAMP




#150062
QUICK COUPLING KSB INLET
STAINLESS STEEL PLUG



#150088
QUICK COUPLING KSB INLET
1/2" CLAMP

OUTLET



#150061
QUICK COUPLING KSB
OUTLET STAINLESS STEEL
PLUG



#150082
QUICK COUPLING KSB
OUTLET 3/8" HOSE BARB
(CLOSABLE)

