

10 PACK O-RING "VARIVENT" EPDM 60 x 3

ART. NO. 400208


GENERAL



KEOFITT has the widest selection of spare parts and accessories to complete your sampling system.



O-ring is included in parts & accessories - contact KEOFIT for further details.

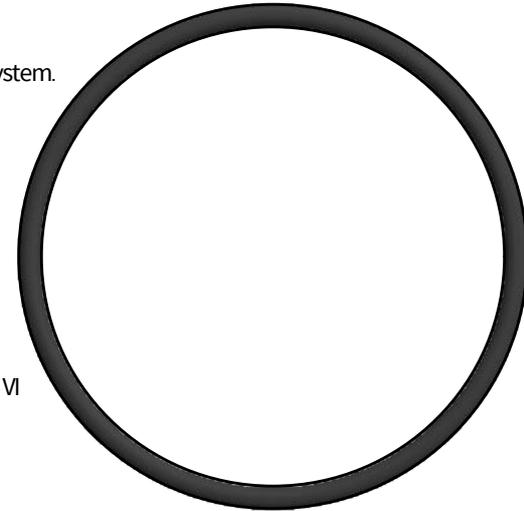

CERTIFICATION*

- EU EC 1935/2004 · EU EC 2023/2006 · DK No. 1248 10/2018 · FDA CFR 21 §177.2600 · USP Class VI
- REACH · RoHS · ADI Free · Keofitt DoC

TECHNICAL DATA

| | |
|--|-------------------------------|
| Type: | EPDM, BLACK (559273-EEB10470) |
| Hardness, ASTM D2240 [Shore A]: | 70±5 |
| Tensile strength, ASTM D412 [MPa]: | 14 |
| Elongation at break, ASTM D412 [%]: | 190 |
| Compression Set 24 hours at 125 °C / 257 °F on slab, ASTM 395 [%]: | 13 |
| Temperature Resistance [°C/°F] | -45 - +150 / -49 - +302 |
| Heat Ageing 70h at 150 °C / 302 °F, ASTM D573: | |
| - Hardness Change [Shore A]: | +1 |
| - Elongation at break change [%]: | -18 |
| - Tensile strength change [MPa]: | -18 |
| Chemical Resistance: | |
| - Air: | Excellent |
| - Alcohol: | Excellent |
| - Alkali: | Excellent |
| - Fats: | Unsatisfactory |
| - Hydrocarbons: | Unsatisfactory |
| - Water: | Excellent |
| - Ozone: | Excellent |
| - Steam: | Good up to 140 °C / 284 °F |
| Net weight [kg/lbs]: | 0.00157 kg/0.00346 lbs |
| Storage stability, ISO 2230 [years]: | 10 |

*For further information and download please visit www.keofitt.dk