


# VALVE BODY W15 C2"ASME/DIN 3/4" CLAMP

ART. NO. 860002

## GENERAL

-  The KEOFIT CLASSIC W15 Sampling Valve is designed for high viscosity sampling such as fruit pulp etc.. Design based on the original KEOFIT and based on one-piece-construction. Unique serial no. for each valve\*.
-  The sampling valve can be used for any process sampling for microbiological, chemical and/or physical analysis.
-  Cleaning/sterilizing: Between batches: Valve in open position: Cleanable by means of CIP using the detergent solution suitable for the actual process media. Between samples: Valve in its normal closed position: cleanable by CIP as "Between batches" or the valve may be sterilized by means of steam SIP or chemical SIP using a procedure appropriate to the actual circumstances. For further advice, please contact KEOFIT.
-  Designed for sampling of liquids with a viscosity of up to approx. 50.000 cP containing no particles larger than Ø8 mm. Sampling of more viscous liquids is possible, only will it take longer (depending on process pressure).

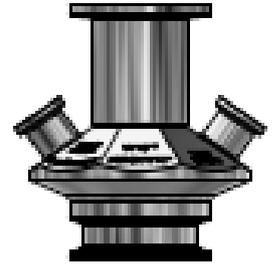

## FEATURES

-  Installation: 2" Clamp: DIN 32676-B-50,8 x 1,65  
DIN 32676:2022-10 Table 5 Row C, I.D.18mm, can be fitted for NA-connect acc. ASME BPE-2 / DIN
-  Operation: Depending on choice of valve head
-  Inlet / Outlet: 3/4" Clamp: DIN 32676-B-19,05 x 1,65 DIN 32676:2022-10 Table 5 Row C, I.D.15,75mm
-  Membrane: Depending on choice of valve head

## CERTIFICATION\*

- EU EC 1935/2004 · EU EC 2023/2006 · DK No 681 25/05/2020 · 3.1 Material Certificate · Ra Certificate
- ATEX 2014/34/EU · PED 2014/68/EU · KEOFIT DoC Stainless Steel 1.4404.

## TECHNICAL DATA

Steel parts: AISI 316L (1.4404)

### Material (without process contact)

Steel parts: AISI 304L (1.4304)

### Surface Treatment

Outside: Electropolished Ra <= 1.2 µm  
Inside (wetted surface): Electropolished Ra <= 0.5 µm  
Process connection: Electropolished Ra <= 0.5 µm

### Pressure & Temperature



Pressure: Depending on choice of valve head  
Temperature: Depending on choice of valve head  
Air supply: Depending on choice of valve head

### Net weight

Kg/lbs: 1.898kg / 4.181 lbs

## SPARE PARTS

- NOT APPLICABLE

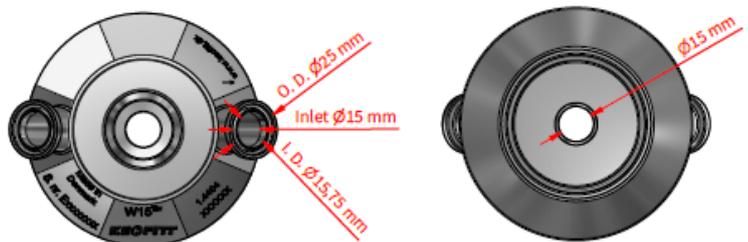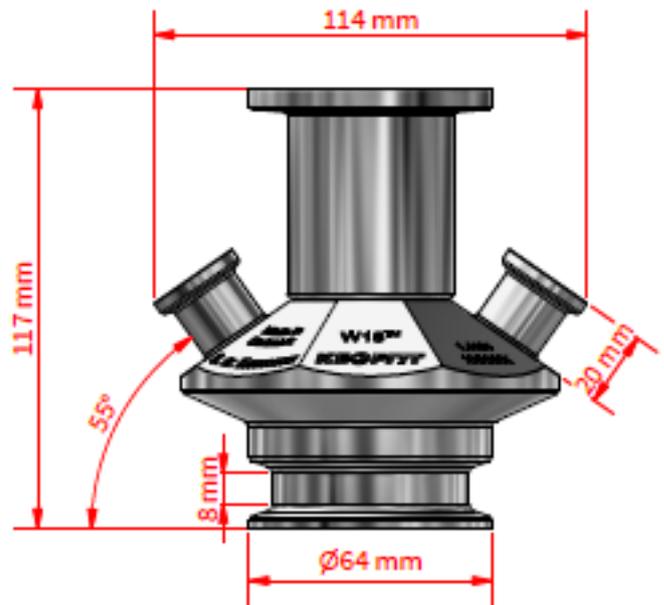

\*For further information and downloads please visit [www.keofitt.dk](http://www.keofitt.dk)