

VALVE BODY W15 C3"ASME/DIN 3/4" CLAMP

ART. NO. 860003

GENERAL

-  The KEOFITT CLASSIC W15 Sampling Valve is designed for high viscosity sampling such as fruit pulp etc.. Design based on the original KEOFITT and based on one-piece-construction. Unique serial no. for each valve*.
-  The sampling valve can be used for any process sampling for microbiological, chemical and/or physical analysis.
-  Cleaning/sterilizing: Between batches: Valve in open position: Cleanable by means of CIP using the detergent solution suitable for the actual process media. Between samples: Valve in its normal closed position: cleanable by CIP as "Between batches" or the valve may be sterilized by means of steam SIP or chemical SIP using a procedure appropriate to the actual circumstances. For further advice, please contact KEOFITT.
-  Designed for sampling of liquids with a viscosity of up to approx. 50.000 cP containing no particles larger than Ø8 mm. Sampling of more viscous liquids is possible, only will it take longer (depending on process pressure).



FEATURES

-  Installation: 3" Clamp: DIN 32676-B-76,2 x 1,65
DIN 32676:2022-10 Table 5 Row C, I.D.18mm, can be fitted for NA-connect acc. ASME BPE-2 / DIN
-  Operation: Depending on choice of valve head
-  Inlet / Outlet: 3/4" Clamp: DIN 32676-B-19,05 x 1,65 DIN 32676:2022-10 Table 5 Row C, I.D.15,75mm
-  Membrane: Depending on choice of valve head

CERTIFICATION*

- EU EC 1935/2004 · EU EC 2023/2006 · DK No 681 25/05/2020 · 3.1 Material Certificate · Ra Certificate
- ATEX 2014/34/EU · PED 2014/68/EU · KEOFITT DoC Stainless Steel 1.4404.

TECHNICAL DATA

Steel parts: AISI 316L (1.4404)

Material (without process contact)

Steel parts: AISI 304 (1.4304)

Surface Treatment

Outside: Electropolished Ra <= 1.2 µm
Inside (wetted surface): Electropolished Ra <= 0.5 µm
Process connection: Electropolished Ra <= 0.5 µm

Pressure & Temperature



Pressure: Depending on choice of valve head
Temperature: Depending on choice of valve head
Air supply: Depending on choice of valve head

Net weight

Kg/lbs: 2.354 kg / 5.185 lbs

SPARE PARTS

- NOT APPLICABLE

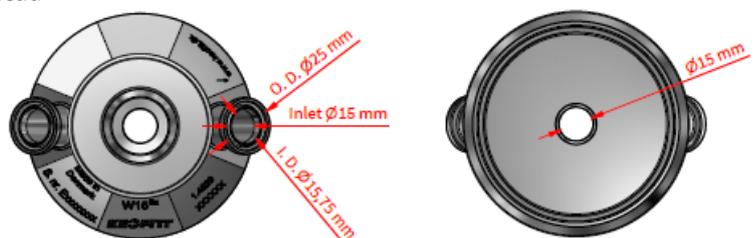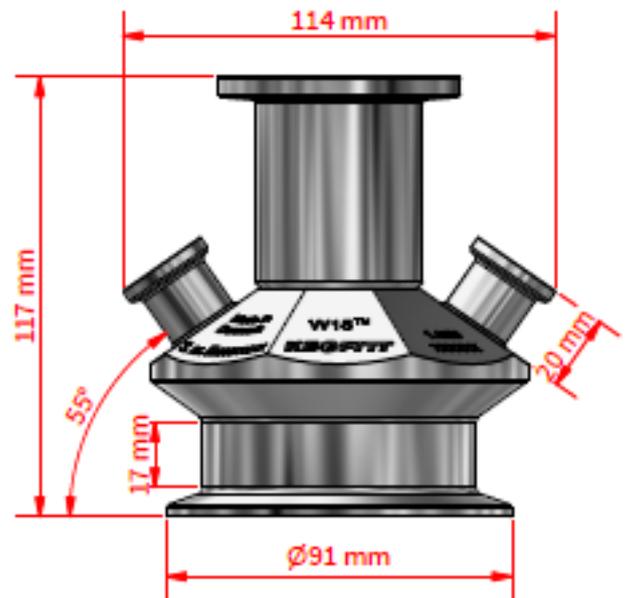

*For further information and downloads please visit www.keofitt.dk