


# SESAME BODY TYPE I40 MM 1/2" CLAMP ID9.4

ART. NO. 893105

## GENERAL

- The KEOFITT SESAME "INGOLD" Sampling Valve is part of our patented dual-seat sampling valve. Unique in the market, it eliminates dead-leg during sampling while incorporating steam supply control. Unique serial no. for each valve\*.
- The sampling valve can be used for any process sampling for microbiological, chemical and/or physical analysis.
- Cleaning/sterilizing: Between batches: Valve in open position: Cleanable by means of CIP using the detergent solution suitable for the actual process media. Between samples: Valve in its normal closed position: cleanable by CIP as "Between batches" or the valve may be sterilized by means of steam SIP or chemical SIP using a procedure appropriate to the actual circumstances. For further advice, please contact KEOFITT.
- Designed for sampling of liquids with a viscosity of up to approx. 1.000 cP containing no particles larger than Ø2 mm. Sampling of more viscous liquids is possible, only will it take longer (depending on process pressure).

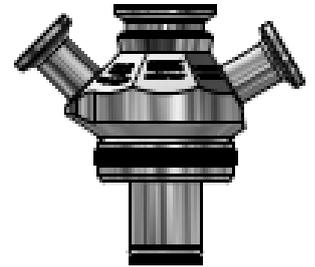

## FEATURES

- Installation: 40 mm Ingold port
- Operation: Depending on choice of valve head
- Inlet / Outlet: 1/2" Clamp: DIN 32676-A-12.7 x 1.65  
DIN 32676:2022-10 Table 5 Row C, I.D. 9.4mm
- Membrane: Depending on choice of valve head

## CERTIFICATION\*

EU EC 1935/2004 · EU EC 2023/2006 · DK No. 1248 10/2018 · 3-A Certificate · 3.1 Material Certificate · Ra Certificate · ATEX 2014/34/EU · PED 2014/68/EU · KEOFITT DoC Stainless Steel 316L

## TECHNICAL DATA

### Material (process contact)

Steel parts: AISI 316L (1.4435 BN2)  
O-ring: Silicone, transparent (#300119)  
EU EC 1935/2004 · EU EC 2023/2006 · DK No. 1248 10/2018 · FDA CFR 21 §177.2600 · USP Class VI · ADI Free · KEOFITT DoC Silicone

### Material (without process contact)

Steel parts: AISI 316L (1.4404)  
Steel parts: AISI 304L (1.4301)

### Surface Treatment

Outside: Electropolished Ra <= 1.2 µm  
Inside (wetted surface): Electropolished Ra <= 0.38 µm  
Process connection: Electropolished Ra <= 0.38 µm

### Pressure & Temperature



Pressure: Depending on choice of valve head  
Temperature: Depending on choice of valve head  
Air supply: Depending on choice of valve head

### Net weight

Kg/lbs: 0.823 kg / 1.814 lbs

## SPARE PARTS

## 300119 10 Pack O-ring silicone 20.24 x 2.62

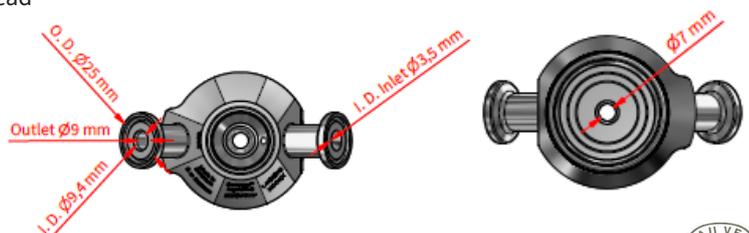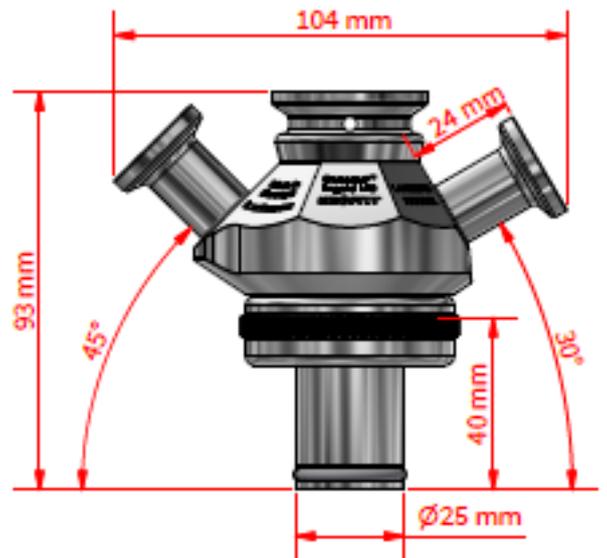

\*For further information and downloads please visit [www.keofitt.dk](http://www.keofitt.dk)