


# SESAME HEAD I40 MM TYPE N

ART. NO. 893144PTFE

## GENERAL

-  The KEOFITT SESAME “INGOLD” Sampling Valve is part of our patented dual-seat sampling valve. Unique in the market, it eliminates dead-leg during sampling while incorporating steam supply control. Unique serial no. for each valve\*.
-  The sampling valve can be used for any process sampling for microbiological, chemical and/or physical analysis.
-  **Cleaning/sterilizing:** Between batches: Valve in open position: Cleanable by means of CIP using the detergent solution suitable for the actual process media. Between samples: Valve in its normal closed position: cleanable by CIP as “Between batches” or the valve may be sterilized by means of steam SIP or chemical SIP using a procedure appropriate to the actual circumstances. For further advice, please contact KEOFITT. Autocalvable.
-  Designed for sampling of liquids with a viscosity of up to approx. 1.000 cP containing no particles larger than Ø2 mm. Sampling of more viscous liquids is possible, only will it take longer (depending on process pressure).

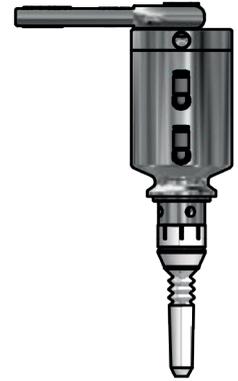

## FEATURES

-  **Installation:** Clamp connection (clamp ring included #900189)
-  **Membrane:** PTFE (#895531)
-  **Operation:** Pneumatically operated/ Lever handle (#600170)  
Spring closed - when not pressurized.

## CERTIFICATION\*

- Valve body:** EU EC 1935/2004 · EU EC 2023/2006 · EU EC 10/2011 · DK No 681 25/05/20 · ATEX 2014/34/EU · PED 2014/68/EU · FDA CFR 21 §177.1550 · USP Class VI · Keofitt DoC
- Membrane:** EU EC 1935/2004 · EU EC 2023/2006 · DK No 681 25/05/20 · FDA CFR 21 §177.2600 · USP Class VI · ADI Free · Keofitt DoC
- O-ring:** EU EC 1935/2004 · EU EC 2023/2006 · DK No 681 25/05/20 · FDA CFR 21 §177.2600 · USP Class VI · REACH · RoHS · ADI Free

## TECHNICAL DATA

### Material (process contact)

Membrane: PTFE, White (#895531)

### Material (without process contact)

Steel parts: AISI 316L (1.4404)  
Lever handle: AISI 316L (1.4404)  
O-ring: EPDM, Black (#880830)

### Pressure & Temperature


Pressure: -1 to 10 bar / -14,5 to 145 psi (Process & CIP/SIP)  
Temperature: 1 to 150°C / 34 to 302°F  
Air supply: 4 to 7 bar / 58 to 101 psi

### Net weight

Kg/lbs: 1.582 kg/3.485 lbs

## SPARE PARTS

# 895531 Membrane PTFE Sesame I40 mm  
# 880830 10 pack O-ring EPDM 20.35 x 1.78

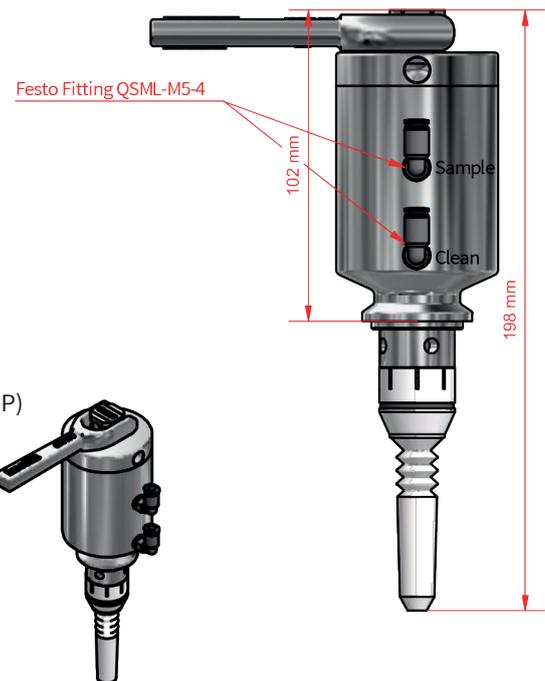

\*For further information and downloads please visit [www.keofitt.dk](http://www.keofitt.dk)