

MEMBRANE PTFE SESAME I52

ART. NO. 895532

GENERAL



KEOFITT has the widest selection of spare parts and accessories to complete your sampling system. The patented membrane design is an essential part of the hygienic design of the KEOFITT sampling valves.

FEATURES



Compatible with all KEOFITT Sesame I52 valve heads equipped with PTFE membrane

CERTIFICATION*

- EU EC 1935/2004 · EU EC 2023/2006 · EU EC 10/2011 · DK No. 1248 10/2018 · FDA CFR 21 §177.1550
- USP Class VI · ADI Free · Keofitt DoC



TECHNICAL DATA

Material (process contact)


Type:	PTFE, WHITE (#895532)
Tensile strength, ASTM D 4894-98a [psi/bar]:	4800/330
Elongation at break, ASTM D 4894-98a [%]:	450
Density, ASTM D 4894-98a [g/cc]:	2.16
Service Temperature Range [°C/°F]:	-200 - +260 / -328 - +500
Deformation under Load, ASTM D 621 [%]:	
2175 psi - 24 h	9
2175 psi - 100 h	10
2175 psi - permanent	4.5
Flammability, UL94	V-0
Melt point, initial, ASTM D 4894-98a [°C/°F]:	342±10/647±50
Net weight [kg/lbs]:	0.011 kg/0.024 lbs

Material (without process contact)

- O-ring
- EPDM, BLACK (#880830)
- EU EC 1935/2004 · EU EC 2023/2006 · DK No. 1248 10/2018
 - FDA CFR 21 §177.2600 · USP Class VI · REACH · RoHS · ADI Free

SERVICE TIME

Average service life of a PTFE membrane is 12 months, but depends very much on operating conditions and choice of cleaning method and sterilization - actual life expectancy must be experimentally determined by the user.

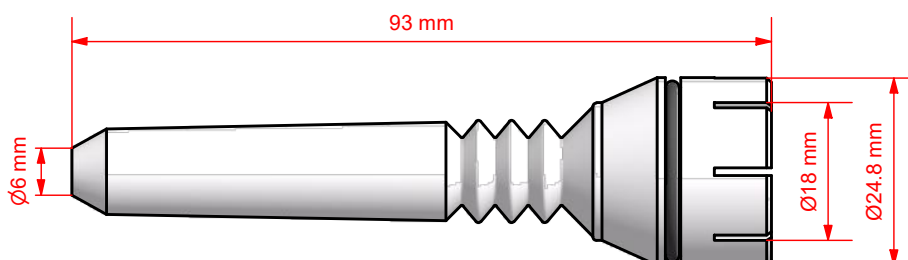

*For further information and download please visit www.keofitt.dk